1030nm 3-port Circulator for Pulse Power

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

APPLICATIONS

- Fiber Optic Amplifiers
- Fiber Optic Instruments
- WDM Systems
- Dispersion Compensation
- Light Routing

SPECIFICATIONS

Parameter		Unit	Value
Working Wavelength		nm	1030+/-5
Insertion Loss@23°C	(Typ.)	dB	3.9
	(Max.)	dB	4.0
Isolation	(Typ.)	dB	23
	(Min.)	dB	18
PDL		dB	≤0.3
Optical Return Loss		dB	≥50
Cross Talk		dB	≥45
Fiber Type		-	HI1060 Fiber or 10/125um SC Fiber (E) 10/125um DC Fiber (O), 15/130um DC Fiber (W) 20/130um DC Fiber (Q) or 25/250um DC Fiber (R)
Fiber Tensile Load		N	5
Max. Average Optical Power		mW	50
Max. Peak Power for Pulse		kW	0.1, 1, 2, 3, 5, 10, 15, 20
Operating Temperature		°C	0~50
Storage Temperature		°C	-10~65

Note: 1. Specifications are for device without connectors; Specifications may change without notice.
2. To add connectors, IL is 0.5dB higher, RL is 5dB lower.
3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
4.Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

DIMENSION DRAWING

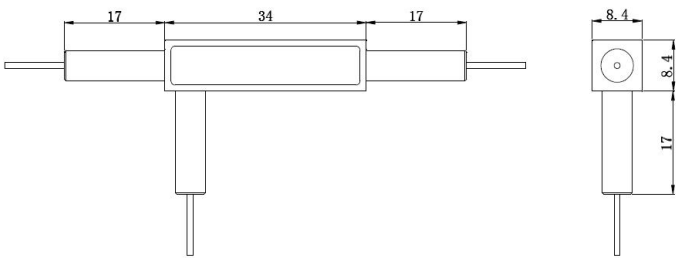

ORDERING INFORMATION (PN)

FCIR- NNNN -3H NNN P NN - (C) C NN - CC/CCC

Center Wavelength	Average Power	Peak Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
1030=1030nm	005=50mW	01=100W	E=10/125 SC Fiber	B= Bare fiber	05=0.5m	N=Without Connector
		1= 1kW	Q=20/130 DC Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
		10= 10kW	R=25/250 DC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
		20=20kW	*Blank* for HI1060 Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector