


1040nm 3-port Optical Circulator for Pulse Power

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

APPLICATIONS

- Fiber Optic Amplifiers
- Fiber Optic Instruments
- WDM Systems
- Dispersion Compensation
- Light Routing

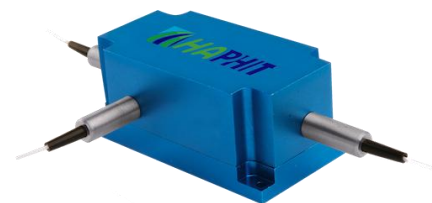


SPECIFICATIONS

Parameter	Unit	Value	
Center Wavelength	nm	1040	
Operating Wavelength Range	nm	+/-10	
Insertion Loss@ 23 °C (1→2 or 2→3)	(Typ.)	dB	0.8
	(Max.)	dB	1.6
Isolation @ 23 °C (3→2 or 2→1)	(Typ.)	dB	23
	(Min.)	dB	20
Optical Return Loss	dB	≥45	
Polarization Dependent Loss	dB	≤0.2	
Fiber Type	-	HI1060 Fiber or 10/125um SC Fiber (E) 10/125um DC Fiber (O), 15/130um DC Fiber (W) 20/130um DC Fiber (Q) or 25/250um DC Fiber (R)	
Fiber Tensile Load	N	5	
Max. Average Optical Power	W	0.5, 1, 2, 3, 5, 10, 15, 20, 25, 30, 50, 60, 80, 100	
Max. Peak Power for pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20	
Operating Temperature	°C	0~50	
Storage Temperature	°C	-10~65	

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
 2. To add connectors, IL is 0.5dB higher, RL is 5dB lower.
 3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.
 5. Package size maybe different for different fiber type, optical power, etc.

DIMENSION DRAWING

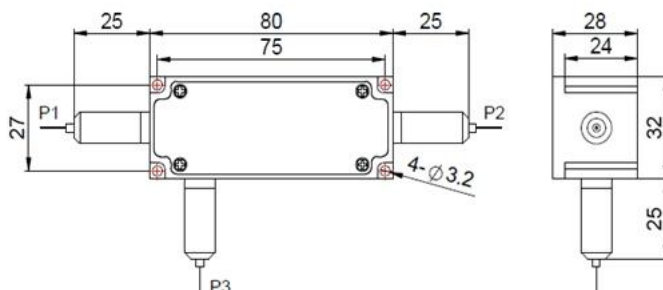

ORDERING INFORMATION (PN)

FCIR-	NNNN	-3H	NN	P NN	- (NN)	- (C)	C	NN	-CC/CCC
Center Wavelength	Average Power	Peak Power	Average Power P2	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type		
1040-1040nm	05-500mW	01-100W	1- 1W	E-10/125 SC Fiber	B- Bare fiber	05-0.5m	N-Without Connector		
	1-1W	1- 1kW	2- 2W	Q-20/130 DC Fiber	L- Loose Tube	10-1.0m	FC/APC=FC/APC Connector		
	5-5W	10- 10kW	5-5W	R-25/250 DC Fiber	2- 2mm Cable	15-1.5m	LC/PC=LC/PC Connector		
	20-20W	20-20kW	Blank for P2-P1	Blank for HI1060 Fiber	3- 3mm Cable	20-2.0m	SC/UPC=SC/UPC Connector		

