


1053nm 3-port High Power Optical Circulator

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

APPLICATIONS

- Fiber Optic Amplifiers
- Fiber Optic Instruments
- WDM Systems
- Dispersion Compensation
- Light Routing

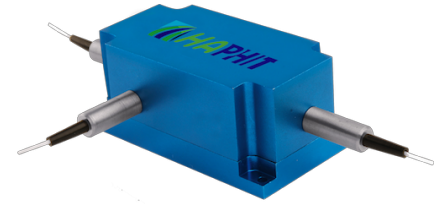


SPECIFICATIONS

Parameter	Unit	Value
Center Wavelength	nm	1053
Operating Wavelength Range	nm	+/-10
Insertion Loss@ 23 °C	(Typ.)	0.8
	(1→2 or 2→3) (Max.)	1.5
Isolation @ 23 °C	(Typ.)	23
	(3→2 or 2→1) (Min.)	20
Optical Return Loss	dB	≥45
Polarization Dependent Loss	dB	≤0.2
Fiber Type	-	HI1060 Fiber or 10/125um SC Fiber (E) 10/125um DC Fiber (O), 15/130um DC Fiber (W) 20/130um DC Fiber (Q) or 25/250um DC Fiber (R)
Fiber Tensile Load	N	5
Maximum Optical Power	W	0.5, 1, 2, 3, 5, 10, 15, 20, 25, 30
Operating Temperature	°C	0~50
Storage Temperature	°C	-10~65

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.5dB higher, RL is 5dB lower.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device

PACKAGE DIMENSION

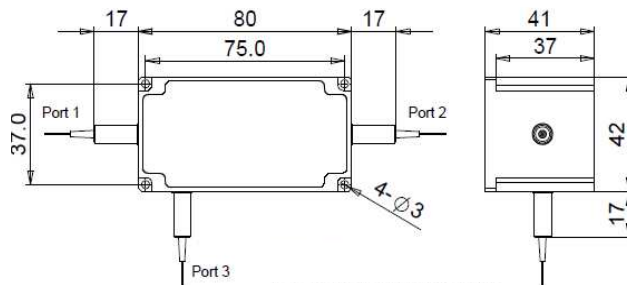

ORDERING INFORMATION (PN)

FCIR-	NNNN	-3HP NN	-	(C)	C	NN	-	CC/CC
<i>Center Wavelength</i>	<i>Optical Power</i>	<i>Fiber Type</i>		<i>Fiber Sleeve</i>		<i>Fiber Length</i>		<i>Connector Type</i>
1053=1053nm	05=500mW	E=10/125 SC Fiber		B= Bare fiber		05=0.5m		N=Without Connector
	1=1W	Q=20/130 DC Fiber		L= Loose Tube		10=1.0m		FC/APC=FC/APC Connector
	5=5W	R=25/250 DC Fiber		2= 2mm Cable		15=1.5m		LC/PC=LC/PC Connector
	20=20W	Blank for HI1060 Fiber		3= 3mm Cable		20=2.0m		SC/UPC=SC/UPC Connector