

1056/1020-1120nm High Power WDM Filter

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Metro Networks
- CATV Networks




SPECIFICATIONS

Parameters	Unit	Standard	High Isolation	
Pass Channel Wavelength Range λ_1	nm	1056 \pm 2		
Reflective Channel Wavelength Range λ_2	nm	1020 \pm 10, 1030 \pm 10, 1040 \pm 5, 1064 \pm 2		
		1070 \pm 10, 1080 \pm 10, 1092 \pm 10, 1120 \pm 10, 1150 \pm 10		
Insertion Loss	Pass Channel@ λ_1	dB		
	Reflective Channel@ λ_2	dB		
Configuration	Y Type	3-port		
	X Type	4-port (2x2 WDM)		
Isolation	Pass Channel@ λ_2	dB	dB	
	Reflective Channel@ λ_1	dB	dB	
Optical Return Loss		dB		
Directivity		dB		
Polarization Dependent Loss		dB		
Fiber Type		HI1060 Fiber or 10/125um SC Fiber (E)		
		10/125um DC Fiber (O), 15/130um DC Fiber (W)		
		20/130um DC Fiber (Q) or 25/250um DC Fiber (R)		
Fiber Tensile Load	N	5		
Maximum Optical Power (CW)	W	1, 2, 3, 5, 10, 15, 20, 30, 40, 50, 60		
Operating Temperature	°C	0~50		
Storage Temperature	°C	-40~85		
Package Dimension	Stainless Steel Tube (SST)	mm	$\varnothing 5.5 \times L^{35} (\leq 5W)$; $\varnothing 6.0 \times L^{50} (5 \sim 10W)$	
	Metal Box	mm	$L^{120} \times W^{12} \times H^{10} (\leq 10W)$	

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
 2. To add connectors, IL is 0.5dB higher, RL is 5dB lower.
 3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE DIMENSION (> 10W)

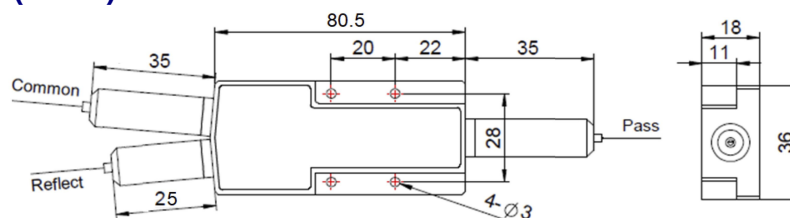

ORDERING INFORMATION (PN)

FFWM- NN	NN	- (C)	(C) - HP NN	- (C)	(C)	C	NN	-CC/CCC	
Ref Wavelength	Pass Wavelength	Configuration	Isolation	Optical Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
03= 1030nm	56= 1056nm	X=X Type	I= High Iso	1=1W	M= Metal Box	E=10/125 SC Fiber	B= Bare Fiber	05=0.5m	N= Without Connector
06=1064nm		Blank for Y Type	Blank for	5=5W	Blank for SST	Q=20/130 DC Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
09= 1092nm			Standard	10=10W	or >10W	R=25/250 DC Fiber	2=2mm Cable	15=1.5m	LC/PC=LC/PC Connector
12=1120nm				20=20W		Blank for HI1060 Fiber	3=3mm Cable	20=2.0m	SC/UFC=SC/UFC Connector