

1900~1970nm PBC(PBS)/Isolator Hybrid for Pulse Power

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

APPLICATIONS

- Fiber Optic Amplifiers
- Fiber Optic Instruments
- WDM Systems
- Transmitters and Fiber Lasers
- CATV Networks




SPECIFICATIONS

Parameter	Unit	Single Stage	Dual Stage	H Stage
Working Wavelength (λ)	nm	1900 \pm 10, 1930 \pm 20, 1950 \pm 20, 1970 \pm 20		
Isolation (λ , 23 $^{\circ}$ C)	dB	\geq 16	\geq 30	\geq 25
Insertion Loss (λ , 23 $^{\circ}$ C)	dB	\leq 1.6	\leq 1.9	\leq 1.9
Optical Return Loss (Input/Output)	dB	50/45	50/45	50/45
Extinction Ratio	dB	\geq 18		
Fiber Type of Port 3	S Type	-	Corresponding SM Fiber	
	P Type	-	Same Fiber to Port1&2, Slow axis align to Port 1	
	Q Type	-	Same Fiber to Port1&2, Slow axis is 45 $^{\circ}$ to Port 1	
Fiber Type of Port1 & Port2	-	PM1550 Panda Fiber or PM1950 Fiber (V) 10/130um PMDC Fiber (O) or 25/250um PMDC Fiber (R)		
Fiber Tensile Load	N	5		
Max. Average Optical Power	W	0.3, 0.5, 1, 2		3, 5, 10, 15, 20
Max. Peak Power for pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20		
Operating Temperature	$^{\circ}$ C	0~50		
Storage Temperature	$^{\circ}$ C	-20~75		
Package	Stainless Steel Tube (SST)	mm	Φ 5.5x35	
Dimension	Metal Box-M	mm	(L)120x(W)12x(H)10	

- Note:**
1. Specifications are for device without connectors; Specifications may change without notice.
 2. To add connectors, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE DIMENSION (H STAGE)

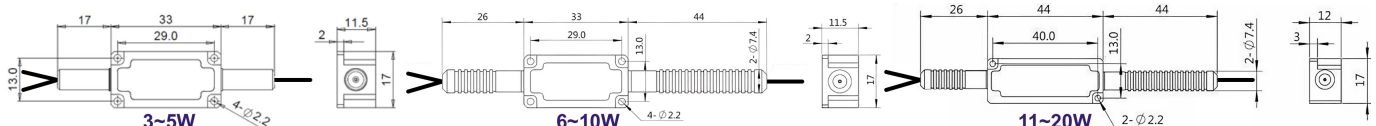

ORDERING INFORMATION (PN) FHIC=PBC/Isolator Hybrid; FHIS=PBS/Isolator Hybrid.

FHIC

FHIS	-NNNN	-C	C	-H NN	P NN	-(C)	C	C	NN	-CC/CCC
Center Wavelength	Stage	3rd Port Fiber	Average Power	Peak Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type	
1900~ 1900nm	S= Single Stage	S=S Type	03=300mW	01= 100W	M= Metal Box	2=PM1550Fiber	B= Bare fiber	05=0.5m	N=Without Connector	
1930~ 1930nm	D= Dual Stage	P=P Type	1= 1W	1=1kW	Blank for SST	V=PM1950 Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector	
1950~ 1950nm	H= H Stage	Q=Q Type	10=10W	5=5kW	or >2W Power	O=10/130 PMDC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector	
1970~ 1970nm			20= 20W	10=10kW		R=25/250 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector	