

1500~1600/2000nm WDM/Isolator Hybrid Filter for Pulse

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Metro Networks




SPECIFICATIONS

Parameters	Unit	Single Stage	Dual Stage	H Stage
Signal Wavelength Range λ_1	nm	2000 \pm 20		
Pump Wavelength Range λ_2	nm	1530 \pm 20, 1550 \pm 20, 1570 \pm 20, 1590 \pm 20		
Insertion Loss	Signal Channel@ λ_1	dB	\leq 1.6	\leq 2.0
	Pump Channel@ λ_2	dB	\leq 1.0	
Signal Isolation (Signal Channel@ λ_1)	dB	\geq 16	\geq 35	\geq 25
Signal/Pump Wavelength Isolation	dB	\geq 25/12		
Optical Return Loss	dB	\geq 45		
PDL	dB	\leq 0.2		
Fiber Type	-	SMF-28 Fiber or SM1950 Fiber (V)		
		10/130um DC Fiber (O) or 25/250um DC Fiber (R)		
Fiber Tensile Load	N	5		
Max. Average Optical Power	W	0.3, 0.5, 1, 2		3, 5, 10
Max. Peak Power for pulse	kW	0.1, 1, 2, 5, 10, 15, 20		
Operating Temperature	$^{\circ}$ C	0~50		
Storage Temperature	$^{\circ}$ C	-40~85		
Package Dimension	Stainless Steel Tube (SST)	mm	(\varnothing) 5.5x35	
	Metal Box	mm	(L)120x(W)12x(H)10	

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.3dB higher, RL is 5dB lower.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

DIMENSION DRAWING (H STAGE)

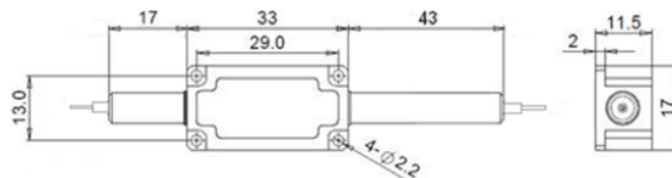

ORDERING INFORMATION (PN)

FHWM-NN	NN	-	C	C	-H NN	P NN	-(C)	(C)	C	NN	-CC/CCC
Pump WL	Signal WL	Stage	Pump Type	Average Power	Peak Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type	
53=1530nm	20=2000nm	S=Single Stage	F= Forward	03=300mW	01=100W	M= Metal Box	V= SM1950 Fiber	B= Bare fiber	05=0.5m	N=Without Connector	
15=1550nm		D= Dual Stage	B= Backward	1= 1W	1= 1kW	Blank for SST	O=10/130 DC Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector	
57=1570nm		H=H Stage		5=5W	10= 10kW	or >2W	R=25/250 DC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector	
59=1590nm				10= 10W	20=20kW		Blank for SMF-28 Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector	