

780~850/1900~1970nm High Power WDM/Isolator Hybrid Filter

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Metro Networks




SPECIFICATIONS

Parameters	Unit	Single Stage	Dual Stage	H Stage
Signal Wavelength Range λ_1	nm	1900±10, 1930±20, 1950±20, 1970±20		
Pump Wavelength Range λ_2	nm	780+/-10, 793+/-10, 808+/-10, 830+/-10, 850+/-10		
Insertion Loss	Signal Channel@ λ_1	dB	≤1.6	≤2.0
	Pump Channel@ λ_2	dB	≤1.3	
Signal Isolation (Signal Channel@ λ_1)	dB	≥10	≥25	≥25
Signal/Pump Wavelength Isolation	dB	≥25/12		
Optical Return Loss	dB	≥45		
PDL	dB	≤0.2		
Fiber Type	Common & Signal Port	-	SMF-28 Fiber or SM1950 Fiber (V)	
			10/130um DC Fiber (O) or 25/250um DC Fiber (R)	
	Pump Port		Same Fiber, 780HP Fiber or HI780 Fiber	
Fiber Tensile Load	N	5		
Max. Optical Power (CW)	W	0.3, 0.5, 1, 2		3, 5, 10
Operating Temperature	°C	0~50		
Storage Temperature	°C	-40~85		
Package	Stainless Steel Tube (SST)	mm	(Ø)5.5x35	
Dimension	Metal Box	mm	(L)120x(W)12x(H)10	

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.7dB higher, RL is 5dB lower.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

DIMENSION DRAWING (H STAGE)

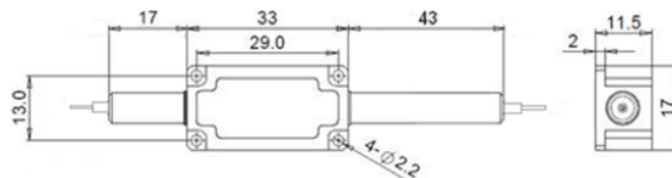

ORDERING INFORMATION (PN)

FHWM-NN	NN -	C	C	C	-HP NN	-(C)	(C)	C	NN	-CC/CCC
Pump WL	Signal WL	Stage	Pump Type	Pump Fiber	Optical Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
78-780nm	90-1900nm	S=Single Stage	F= Forward	Y=Same Fiber	1= 1W	M=Metal Box	V= SM1950 Fiber	B= Bare fiber	05=0.5m	N=Without Connector
79-793nm	93-1930nm	D=Dual Stage	B=Backward	7=780HP Fiber	2=2W	Blank for SST	O=10/130 DC Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
81-808nm	19-1950nm	H=H Stage		H=HI780 Fiber	5=5W	or >2W	R=25/250 DC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
85-850nm	97-1970nm				10= 10W		Blank for SMF-28 Fiber	3= 3mm Cable	20=2.0m	SC/UFC=SC/UFC Connector