

1540nm PM Bandpass Filter for Pulse Power

FEATURES

- High Isolation
- High Reliability and Stability

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems




SPECIFICATIONS

Parameters	Unit	Standard	High ER Type
Center Wavelength	nm	1540	
Min. Pass Band Width @ 0.5dB	nm	2.0, 4.0, 5.0, 7.0, 10.0, 15.0	
Insertion Loss over Pass Band Wavelength	dB	≤1.0	≤1.2
Stop Band @ 25dB	2nm Bandwidth	nm	1510~1538 & 1542~1600
	4nm Bandwidth	nm	1510~1536 & 1544~1600
	5nm Bandwidth	nm	1510~1534 & 1546~1600
	7nm Bandwidth	nm	1510~1533 & 1547~1600
	10nm Bandwidth	nm	1510~1530 & 1550~1600
	15nm Bandwidth	nm	1510~1527.5 & 1552.5~1600
ASE Direction	-	F: Forward, B: Backward, T: Two-way	
Configuration	-	D: 2-port, Y: 3-port, X: 4-port	
Optical Return Loss	dB	≥50	
Extinction Ratio	dB	≥18	≥20
Fiber Type	Input&Output	-	PM1550 Panda Fiber or 10/125um PMDC Fiber (O) 12/130um PMDC Fiber (T), 20/130um PMDC Fiber (Q) 25/250um PMDC Fiber (R) or 25/300um PMDC Fiber (G)
	ASE Guide Out (Y/X Type)	-	Same Fiber, Corr. SM Fiber or MM Fiber
Fiber Tensile Load	N	5	
Max. Average Optical Power (ASE+Signal)	W	0.3, 0.5, 1, 2, 3, 5, 10, 15, 20	
Max. Peak Power for pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20	
Max. ASE Average Power	W	0.3, 0.5, 1, 2, 3, 4, 5, 10	
Operating Temperature	°C	0~70	
Storage Temperature	°C	-40~85	
Package Dimension	Stainless Steel Tube (SST)	mm	(Ø)5.5x35 (≤5W); (Ø)6.0x48 (5~10W)
	Metal Box	mm	(L)90x(W)12x(H)10 (>10W); (L)120x(W)12x(H)10 (≤10W)

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 - High ER type can only work in slow axis; Suggest to use Y/X type or H Box if blocked optical power is ≥1W.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE H (FOR HIGH ASE POWER)

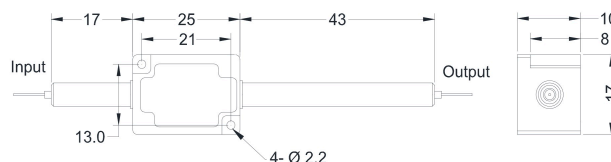

ORDERING INFORMATION (PN)

FPBP-1540-NN(C)(C) (C) (C) - H NN P NN -(NN) -(C) C C NN -CC/CCC

Bandwidth	Type	ASE Type	Fwd ASE Fiber	Bwd ASE Fiber	Average Power	Peak Power	ASE Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
20=2nm	R=High ER	B=Backward	Y=Same Fiber	Y=Same Fiber	03=300mW	01=100W	1= 1W	M=Metal Box	2=PM1550Fiber	B= Bare fiber	05=0.5m	N=Without Connector
50=5nm	Blank for	T=Two-way	S=Corr. SM Fiber	S=Corr. SM Fiber	1= 1W	1= 1kW	5= 5W	H=H Box	0=10/125 PMDC Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
100=10nm	Standard	Blank for Forward	N=None	A=105/125um Fiber	5= 5W	10= 10kW	10=10W	Blank for SST	T=12/130 PMDC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
150=15nm		Blank for D Type	Blank for None or D Type		20=20W	20=20kW	Blank for 300mW		G=25/300 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector