

780~850/1900~1970nm High Power WDM/Iso/Tap PM Hybrid Filter

FEATURES

- High Isolation
- Low Insertion Loss
- High Reliability and Stability

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks




SPECIFICATIONS

Parameters	Unit	Single Stage	Dual Stage	H Stage
Signal Wavelength Range λ_1	nm	1900±10, 1930±20, 1950±20, 1970±20		
Pump Wavelength Range λ_2	nm	780+/-10, 793+/-10, 808+/-10, 830+/-10, 850+/-10		
Excess Loss	Signal Channel@ λ_1	dB	≤1.8	≤2.2
Insertion Loss	Pump Channel@ λ_2	dB	≤1.3	
Signal Tap Ratio		%	1±0.5, 2±0.7, 5±1, 10, 20, 30, 40, 50	
Signal Isolation (Signal Channel@ λ_1 , 23°C)		dB	≥10	≥25
Wavelength Isolation	Signal Channel@ λ_2	dB	≥25	
	Pump Channel@ λ_1	dB	≥12	
Optical Return Loss		dB	≥45	
Extinction Ratio		dB	≥18	
Pump Type	S Type	-	Forward Pump, Only Slow Axis Working	
	F Type	-	Forward Pump, Both Axis Working	
	B Type	-	Backward Pump, Only Slow Axis Working	
Fiber Type	Common & Signal Port	-	PM1550 Panda Fiber or PM1950 Fiber (V)	
		-	10/130um PMDC Fiber (O) or 25/250um PMDC Fiber (R)	
	Pump Port	-	Same Fiber or Corr. SM Fiber	
		-	PM850 Fiber, PM780HP Fiber (7) or HI780 Fiber	
Tap Port	-	Same Fiber or Corr. SM Fiber		
Fiber Tensile Load	N	5		
Maximum Optical Power (CW)	W	1, 2		3, 5, 10
Operating Temperature	°C	0~50		
Storage Temperature	°C	-40~85		
Package Dimension	Stainless Steel Tube (SST)	mm	(Ø)5.5x40	
	Metal Box	mm	(L)120x(W)12x(H)10	

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.7dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE DIMENSION (H STAGE)

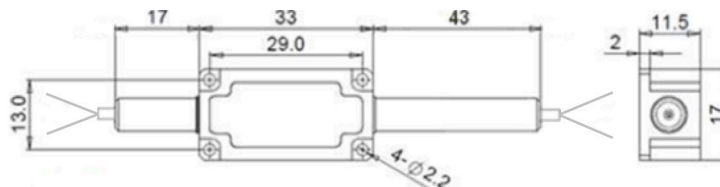

ORDERING INFORMATION (PN)

Pump WL	Signal WL	Stage	Pump Type	Tap Ratio	Pump Fiber	Tap Fiber	Optical Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
78~780nm	90~1900nm	S=Single Stage	S=S Type	01=1%	Y=Same Fiber	P=Same Fiber	1=1W	M=Metal Box	2=PM1550 Fiber	B=Bare Fiber	05=0.5m	N=Without Connector
79~793nm	93~1930nm	D=Dual Stage	F=F Type	05=5%	P=PM850 Fiber	S=Corr. SM Fiber	3=3W	Blank for SST	V=PM1950 Fiber	L=Loose Tube	10=1.0m	FC/APC=FC/APC Connector
81~808nm	19~1950nm	H=H Stage	B=B Type	10=10%	H=HI780 Fiber		5=5W	or >2W	O=10/130 PMDC Fiber	2=2mm Cable	15=1.5m	LC/PC=LC/PC Connector
85~850nm	97~1970nm			50=50%	S=Corr. SM Fiber		10=10W		R=25/250 PMDC Fiber	3=3mm Cable	20=2.0m	SC/APC=SC/APC Connector