

900~950nm High Power Dual Stage PM Isolator for Pulse Power

FEATURES

- High Isolation
- Low Insertion Loss
- Epoxy-Free Optical Path
- High Reliability and Stability
- Low Profile Packaging

APPLICATIONS


- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Metro Networks
- CATV Networks

SPECIFICATIONS

Parameter	Unit	High Power Type	
Center Wavelength (λ_c)	nm	915, 930, 940, 950	
Operating Wavelength Range	nm	+/-10	
Peak Isolation (Typ.)	dB	40	
Min. Isolation (23°C)	dB	35	
Typical Insertion Loss (λ_c , 23°C)	dB	1.0	
Max. Insertion Loss (λ_c , 23°C)	dB	2.0	
Optical Return Loss (Input/Output)	dB	45/45	
Extinction Ratio @ 23°C (Min.)	dB	18	
Working Mode	S Type	-	Can only work in Slow Axis
	F Type	-	Can work both in Slow Axis and Fast Axis
Configuration	-	-	Standard: 2-Port; Y Type: 3-Port, Backward Power Guide Out
Fiber Type	Input&Output	-	PM780-HP Fiber(7), PM850 Fiber, PM980 Fiber(H) or PM1060L Fiber (E)
		-	10/125um PMDC Fiber (O), 15/130um PMDC Fiber (W)
	3 rd Port (Y Type)	-	20/130um PMDC Fiber (Q) or 25/250um PMDC Fiber (R)
Fiber Tensile Load	N	-	5
Max. Average Optical Power	W	-	0.5, 1, 2, 3, 5, 10, 15, 20, 25, 30, 40, 50, 60, 80, 100
Max. Peak Power for Pulse	kW	-	0.1, 1, 2, 3, 5, 10, 15, 20
Max. Backward Average Power	W	-	0.3, 0.5, 1, 2, 3, 5, 10
Operating Temperature	°C	-	0~50
Storage Temperature	°C	-	-20~75

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.7dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Suggest to use Y type for >20W Optical Power or continuous backward power of ≥ 500 mW.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.
 - Package dimensions may be slightly different for different optical power.

PACKAGE DIMENSION

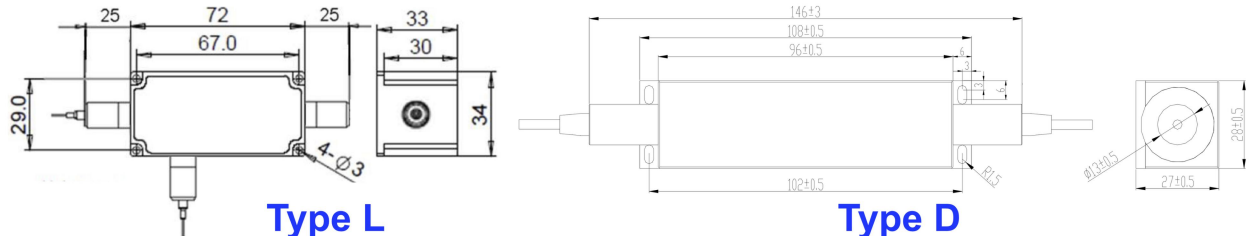

ORDERING INFORMATION (PN)

FPIS-NNN	- C	C	(C)	-H	NN	PNN	- (NN)	- C	C	NN	-CC/CCC
Center Wavelength	Type	Type	3 rd Port Fiber	Average Power	Peak Power	Backward Power	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type	
915~915nm	L-Type L	S=S Type	Y= Same Fiber	05=500mW	01= 100W	05=500mW	2=PM850Fiber	B= Bare Fiber	05=0.5m	N=Without Connector	
930~930nm	D-Type D	F=F Type	A=105/125um Fiber	1=1W	1=1kW	1=1W	H=PM980 Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector	
940~940nm			Blank for Standard	10=10W	10=10kW	10=10W	E=PM1060L Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector	
950~950nm				30=30W	20=20kW	Blank for 300mW	R=25/250 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector	

