

1550/1625/1650nm High Power PM WDM Filter

FEATURES

- High Isolation
- Low Insertion Loss
- High Reliability and Stability
- Various Bandwidth
- High Optical Power

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Laser Systems
- Research Labs



SPECIFICATIONS

Parameters	Unit	Standard	High Isolation
Pass Channel Wavelength Range λ_1	nm	1500-1580	
Reflective Channel Wavelength Range λ_2	nm	1625+/-15, 1620-1660	
Insertion Loss over λ_1 @ Pass Channel	dB	≤ 1.0	≤ 1.2
Insertion Loss over λ_2 @ Reflective Channel	dB	≤ 0.8	
Configuration	Y Type	-	3-port
	X Type	-	4-port (2x2 WDM)
Isolation over λ_1 @ Reflective Channel	dB	≥ 12	
Isolation over λ_2 @ Pass Channel	dB	≥ 25	≥ 45
Optical Return Loss	dB	≥ 50	
Extinction Ratio	Standard	dB	≥ 18
	High ER Type	dB	≥ 20
Fiber Type	-	PM1550 Panda Fiber, 10/125um PMDC Fiber (O), 12/130um PMDC Fiber (T), 20/130um PMDC Fiber (Q) 25/250um PMDC Fiber (R), 25/300um PMDC Fiber (G)	
Polarization Alignment	-	Slow Axis	
Fiber Tensile Load	N	5	
Max. Optical Power (CW)	W	1, 2, 3, 5, 10, 15, 20, 30, 40, 50, 60	
Operating Temperature	°C	0~70	
Storage Temperature	°C	-40~85	
Package Dimension	Stainless Steel Tube (SST)	mm	$\phi 5.5 \times L35$ ($\leq 5W$); $\phi 6.0 \times L50$ (5~10W)
	Metal Box	mm	$L120 \times W12 \times H10$ ($\leq 10W$)

Note: 1. Specifications are for device without connectors; Specifications may change without notice.

2. To add connectors, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.


3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.

4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of

Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

5. High ER type can only work in slow axis at pass port.

PACKAGE DIMENSION (\triangleright 10W)

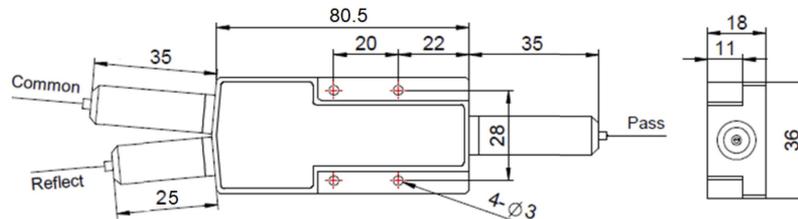

ORDERING INFORMATION (PN)

FPWM-NN	NN	-(C)	(C)	(C)	-HPNN	-(C)	C	C	NN	-CC/CCC
Ref Wavelength	Pass Wavelength	Configuration	Type	Isolation	Optical Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
16-1650nm	15-1550nm	X= X Type	H= High ER	I= High Iso	1= 1W	M= Metal Box	2= PM1550 Fiber	B= Bare Fiber	05= 0.5m	N= Without Connector
62-1625nm	16-1650nm	Blank for Y Type	Blank for	Blank for	5= 5W	Blank for SST	0= 10/125 PMDC Fiber	L= Loose Tube	10= 1.0m	FC/APC=FC/APC Connector
15-1550nm	62-1625nm		Standard	Standard	10= 10W	or >10W	T= 12/130 PMDC Fiber	2= 2mm Cable	15= 1.5m	LC/PC=LC/PC Connector
					20= 20W		R= 25/250 PMDC Fiber	3= 3mm Cable	20= 2.0m	SC/UPC=SC/UPC Connector

