

980/1310/1550/1590nm PM WDM Filter for Pulse Power

FEATURES

- High Isolation
- Low Insertion Loss
- High Reliability and Stability
- Various Bandwidth
- High Optical Power

APPLICATIONS

- Broadband Systems
- Optical Amplifying Systems
- Telecommunication Networks
- Laser Systems
- Research Labs



SPECIFICATIONS

Parameters	Unit	Standard	High Isolation
Pass Channel Wavelength Range λ_1	nm	1310+/-20, 1530-1580, 1570-1610	
Reflective Channel Wavelength Range λ_2	nm	965-1000	
Insertion Loss over λ_1 @ Pass Channel	dB	≤ 1.0	≤ 1.2
Insertion Loss over λ_2 @ Reflective Channel	dB	≤ 0.8	
Configuration	Y Type	-	3-port
	X Type	-	4-port (2x2 WDM)
Isolation over λ_1 @ Reflective Channel	dB	≥ 12	
Isolation over λ_2 @ Pass Channel	dB	≥ 25	≥ 45
Optical Return Loss	dB	≥ 45	
Extinction Ratio	Standard	≥ 18	
	High ER Type	≥ 20	
Fiber Type	Signal Port	-	PM1310/1550 Panda Fiber, 10/125um PMDC Fiber (O) 12/130um PMDC Fiber (T), 20/130um PMDC Fiber (Q) 25/250um PMDC Fiber (R), 25/300um PMDC Fiber (G)
	Common Port	-	Same Fiber or PM980 Fiber
	Pump Port	-	Same Fiber, PM980 Fiber or HI1060 Fiber
Polarization Alignment	-	Slow Axis	
Fiber Tensile Load	N	5	
Max. Average Optical Power	W	0.3, 0.5, 1, 2, 3, 5, 10, 15, 20, 30, 40, 50, 60	
Max. Peak Power for pulse	kW	0.1, 1, 2, 3, 5, 10, 15, 20	
Operating Temperature	°C	0~70	
Storage Temperature	°C	-40~85	
Package Dimension	Stainless Steel Tube (SST)	mm	$\phi 5.5 \times L38$ ($\leq 5W$); $\phi 6.0 \times L50$ (5~8W)
	Metal Box	mm	$L120 \times W12 \times H10$ ($\leq 10W$)

Note: 1. Specifications are for device without connectors; Specifications may change without notice.

2. To add connectors, IL is 0.5dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.

3. Only guarantee 1W continuous wave (CW) power thru testing for connectors added.


4. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of

Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

5. High ER type can only work in slow axis at pass port.

6. Package size may be different for different fiber type, optical power and configurations.

PACKAGE DIMENSION (>10W)

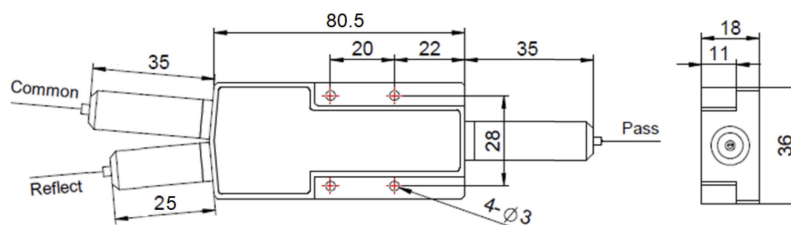

ORDERING INFORMATION (PN)

Signal Wavelength	Pump Fiber	Pump Fiber2	Mode	Comm Fiber	Type	Isolation	Average Power	Peak Power	Average Power (Ref)	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
15=1550nm	Y=Same Fiber	X=Same Fiber	U= Mux	M=PM980 Fiber	H= High ER	I= High Iso	03=300mW	01=100W	1= 1W	M= Metal Box	2=PM1310/1550 Fiber	B= Bare Fiber	05=0.5m	N=Without Connector
59=1590nm	P=PM980 Fiber	P=PM980 Fiber	D= Demux	Blank for Same Fiber	Blank for	Blank for	1= 1W	1= 1kW	2= 2W	Blank for SST	0=10/125 PMDC Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
13=1310nm	S=HI1060 Fiber	S=HI1060 Fiber	Blank for Both		Standard	Standard	10=10W	10=10kW	5=5W	or >10W	T=12/130 PMDC Fiber	2=2mm Cable	15=1.5m	LC/PC=LC/PC Connector
							20=20W	20=20kW	Blank for Sameto Pass		R=25/250 PMDC Fiber	3=3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector

Blank for Y Type

