

## Fiber Pigtailed PhotoDiode

### FEATURES

- High Responsivity
- Low Dark Current
- Wide Passband
- High Stability and Reliability
- Epoxy Free Optical Path

### APPLICATIONS

- Optical Amplifier
- Optical Networks
- Power Monitoring
- Fiber Sensor
- Lab

### SPECIFICATIONS


Parameter	Unit	Value
Center Wavelength	nm	1310, 1480, 1550, 1590, 1310&1550
Bandwidth	nm	+/-30
Responsivity	@1310nm	≥0.75
	@1550nm	≥0.8
Return Loss	dB	≥40
Dark Current ( $V_R=5V$ , 70°C)	Bandwidth=2G	≤2.5
	Bandwidth=0.5G	≤10
Capacitance ( $V_R=5V$ , 1MHz)	Bandwidth=2G	≤1
	Bandwidth=0.5G	≤8
Fiber Type	SM Fiber	SMF-28 Fiber or 10/130um DC Fiber (O)
		12/130um DC Fiber (T) or 20/130um DC Fiber (Q)
		25/250um DC Fiber (R) or 25/300um DC Fiber (G)
	PM Fiber	PM1310/1550 Panda Fiber or 10/125um PMDC Fiber (O)
		12/130um PMDC Fiber (T), 20/130um PMDC Fiber (Q)
		25/250um PMDC Fiber (R) or 25/300um PMDC Fiber (G)
Max. Optical Power on PD (CW)	mW	10
Operating Temperature	°C	0~70
Storage Temperature	°C	-40~85
Soldering Temperature	°C	≤260 (<5s, over 2mm from head)
Absolute Max Reverse Voltage	V	20

**Note:** 1. Specifications are for device without connectors; Specifications may change without notice.

2. To add connectors, RL is 5dB lower.

3. Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

### DIMENSION DRAWING

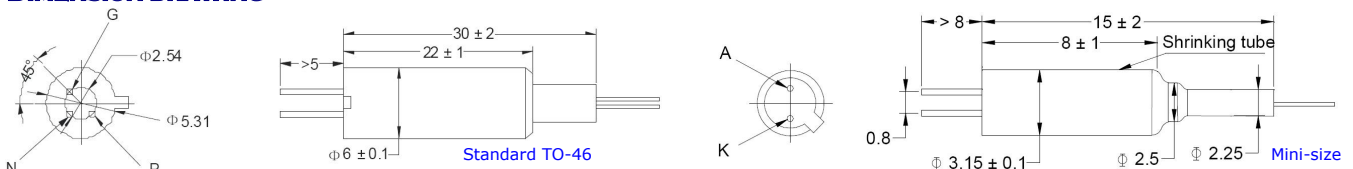

### ORDERING INFORMATION (PN)

Wavelength	Bandwidth	Package	Fiber Type	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
1550-1550nm	20-2G	S-Standard	P-PM Fiber	O=10/130 DC Fiber	B= Bare fiber	05-0.5m	N=Without Connector
1310-1310nm	05-0.5G	M=Mini-size	Blank for SM Fiber	T=12/130 DC Fiber	L= Loose Tube	10-1.0m	FC/APC=FC/APC Connector
1590-1590nm				G=25/300 DC Fiber	2= 2mm Cable	15-1.5m	LC/PC=LC/PC Connector
1315-1310&1550nm				Blank for SMF-28 Fiber	3= 3mm Cable	20-2.0m	SC/UFC=SC/UFC Connector