

1560nm High Power PM BP/Isolator Hybrid (<10nm BW)

FEATURES

- Low Insertion Loss
- High Reliability and Stability

APPLICATIONS

- Optical Amplifying Systems
- Telecommunication Networks




SPECIFICATIONS

Parameters	Unit	Single Stage	Dual Stage	H Stage
Center Wavelength	nm	1560		
Min. Pass Band Width @ 0.5dB	nm	1.0, 2.0, 5.0		
Stop Band @25dB	1nm Bandwidth	1520~1558.5 & 1561.5~1610		
	2nm Bandwidth	1520~1557.5 & 1562.5~1610		
	5nm Bandwidth	1520~1554 & 1566~1610		
Insertion Loss@23°C	dB	≤1.3	≤1.5	≤1.8
Signal Isolation (23°C)	dB	≥25	≥40	≥20
Configuration	D Type	2-port		
	Y Type	3-port, (Blocked Wavelength Guide Out)		
	X Type	4-port, (Both Block Wavelength Guide Out)		
Fiber Type at 3 rd or 4 th Port (Y/X Type)	-	Same Fiber, Corr. SM Fiber or 50/125um MM Fiber		
ASE Direction	Forward Type	Bandpass Filter is before isolator		
	Backward Type	Bandpass Filter is after isolator		
	Twin Type	Bandpass Filter is at both sides of isolator		
Optical Return Loss/Extinction Ratio	dB	≥45 / ≥18		
Work Mode	S Type	Can only work in slow axis		
	F Type	Can work both in slow axis and fast axis		
Fiber Type	-	PM1550 Panda Fiber or 10/125um PMDC Fiber (O) 12/130um PMDC Fiber (T), 20/130um PMDC Fiber (Q) 25/250um PMDC Fiber (R) or 25/300um PMDC Fiber (G)		
Max. Optical Power (CW)	W	1, 2, 3, 5, 10		15, 20
Operating Temperature	°C	0~50		
Storage Temperature	°C	-40~85		
Package	Stainless Steel Tube (SST)	mm	(Ø)5.5x35 (≤5W); (Ø)6.0x48 (5~10W)	
Dimension	Metal Box	mm	(L)120x(W)12x(H)10	

- Note:**
- Specifications are for device without connectors; Specifications may change without notice.
 - To add connectors, IL is 0.3dB higher, RL is 5dB lower, ER is 2dB Lower, Connector key is aligned to slow axis.
 - Suggest to use Y or X type if blocked optical power is >1W.
 - Only guarantee 1W continuous wave (CW) power thru testing for connectors added.
 - Devices for higher optical power or with other type fiber or consigned fiber are also available; Devices can only work in the core of Double Cladding (DC) Fiber, Cladding Power must be stripped before connecting the device.

PACKAGE DIMENSION (H STAGE)

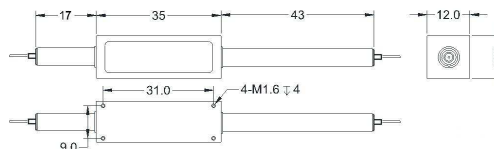

ORDERING INFORMATION (PN)

FHBP-1560-C NN C C - (C) (C) -HP NN -(C) C C NN -CC/CCC

Stage	Bandwidth	ASE Type	Work Mode	3rd Port Fiber	4th Port Fiber	Optical Power	Package	Fiber Type	Fiber Sleeve	Fiber Length	Connector Type
S= Single Stage	10=1nm	F= Forward	S= S Type	Y=Same Fiber	Y=Same Fiber	1= 1W	M= Metal Box	2=PM1550Fiber	B= Bare fiber	05=0.5m	N=Without Connector
D= Dual Stage	20=2nm	B=Backward	F= F Type	S=Corr. SM Fiber	S=Corr. SM Fiber	5= 5W	Blank for SST	0=10/125 PMDC Fiber	L= Loose Tube	10=1.0m	FC/APC=FC/APC Connector
H= H Stage	50=5nm	T=Twin		5=50/125um Fiber	5=50/125um Fiber	10=10W or >10W		T=12/130 PMDC Fiber	2= 2mm Cable	15=1.5m	LC/PC=LC/PC Connector
				Blank for D Type	Blank for D&Y Type	20=20W		G=25/300 PMDC Fiber	3= 3mm Cable	20=2.0m	SC/UPC=SC/UPC Connector